

# Factsheet Hygiene and Infection Protection Concept Stand Construction

Last Updated 26/11/2021



Messe Düsseldorf has worked out a Hygiene and Infection Protection Concept based on the current Corona Protection Ordinance of the federal state North Rhine-Westphalia (CoronaSchVO NRW) with a special view to ensuring the required health precautions, hygiene measures and distancing rules at all forthcoming events at the homebase Düsseldorf. This includes both measures for headcount and space management and hygienic, technical and organisational measures provided by the federal state government for running congresses and trade fairs. The hygiene and infection protection standards are constantly adapted to future developments and changing legal requirements.

All activities performed at the fairgrounds are governed by the Corona Protection Ordinance (CoronaSchVO) of the federal state of North Rhine-Westphalia (<https://www.land.nrw>) as amended.

For the time being, the **following Supplementary Guidelines** (extracts from the [Hygiene and Infection Protection Concept](#) of Messe Düsseldorf) for infection protection shall be observed:

## General Information

---

- The “SARS-CoV-2-Arbeitsschutzstandard” H&S standard of the Federal Ministry for Labour and Social Affairs shall be complied with ([Federal Ministry for Labour and Social Affairs](#)).
- There is a general obligation to wear face masks during the show hours, during **construction and dismantling** whenever the minimum distance of 1.5 m cannot be maintained.
- All employees of exhibitors and service providers must prove at daily inspections (**also during construction and dismantling**) that they have been tested negative for Covid-19 or immunised (recovered, vaccinated) in advance each day when they enter the event site. Otherwise they will not be admitted.  
An overview of rapid test centres in Düsseldorf and the possibility of booking a test can be found at:  
<https://corona.duesseldorf.de/schnelltest#>
- As a matter of principle, the official distancing and hygiene rules apply (Exception: limited mask obligation for **construction and dismantling**):
  - 1.5 m distance
  - Face masks (medical masks, FFP2 or KN95/N95)
  - Etiquette when sneezing, welcoming rituals
  - Supply of disinfectants etc.

## Construction and Dismantling

---

- The trades should work consecutively (consecutive workflow).
- A hygiene concept has to be drawn up for stand construction and dismantling and the print-out must be available at the stand. Responsible persons must be designated.


## Stand Construction / Structural Measures

- Areas enclosed on all sides shall not be permissible for people to stay in as a matter of principle. This also applies to the tensioned fabric ceilings fit for sprinkler installation.  
Excluded are rooms which are only entered by a limited group of people, individually and only for a short length of time, such as storage or utility rooms, unmanned cloakrooms, rooms with lockers, for example.
- All areas (meeting rooms, office rooms, ground floors in multi-storey stands, etc.) are only permissible in an open layout in order to integrate them into the ventilation. Here a complete air exchange is to be achieved.

In structural terms this objective is achieved if the values stated in the following table are implemented taking account of the maximum construction heights permitted:

All halls (excluding Hall 7.0 – 7.2):

Depth of roofing [m]	Required ceiling height [m]	Free opening to the aisle [m <sup>2</sup> ] per 1 m front length
1	2.5	0.35
2	2.5	0.7
3	2.5	1.05
4	2.5	1.4
5	2.5	1.75
6	2.5	2.1
7	2.8	2.45
8	3.2	2.8
9	3.6	3.15
10	4.0	3.5
11	4.4	3.85
12	4.8	4.2
13	5.2	4.55
14	5.6	4.9
15	6.0	5.25

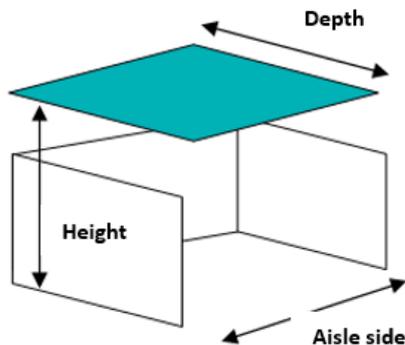

Additionally for Halls 1. 6. 7a. 8a and 8b:

Depth of roofing [m]	Required ceiling height [m]	Free opening to the aisle [m <sup>2</sup> ] per 1 m front length
16	6.4	5.6
17	6.8	5.95
18	7.2	6.3
19	7.6	6.65
20	8.0	7

TAB: one-sided ventilation acc. to ASR A3.6 Lüftung (Technical Rules for Workplaces, Ventilation). Room occupancy acc. to SBauVO (Special Construction Ordinance).

Areas that do not fulfil these requirements and where a complete air exchange is not achieved must be alternatively equipped with a compact air filter system guaranteeing HEPA-filter efficiency (H13 or H14) or fresh air supply must be ensured subject to technical feasibility. Fans and filterless air ventilation systems are not sufficient. Approved filter systems can be obtained via the [OOS](#).

- For simple catering with drinks on exhibition stands, seating or standing places must be available for all guests. We recommend limiting the number of places per table to ten. There should be a distance of at least 1.5 metres (measured from the back of the chair) between the places of adjacent tables, the working areas of staff or waiting areas. Seating or standing directly in front of the bar counter is only permissible with additional barriers.

For further catering at the stands, as a matter of principle, the operators of gastronomy and catering services must draw up their own hygiene and infection protection concept based on the CoronaSchVO and its annexes. They are responsible for the content and ensure implementation on their own responsibility.